


3D Pitot and Console

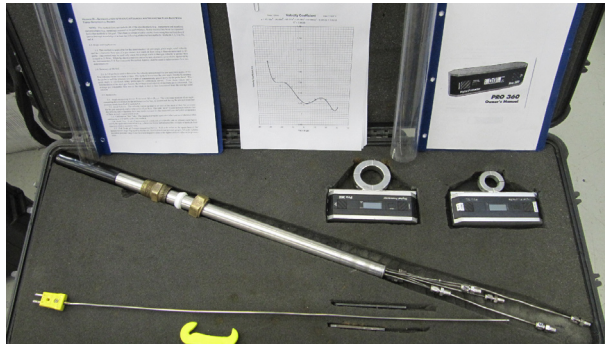

RENTAL AND APPLICATION NOTES:

- Shipping Weight - 70 lbs. (and up).
- Software Required: Optional Windows® Hyper Terminal to download data.
- Umbilical Length: 25', 50', or 100' (specify when ordering).
- Sheath Length: Up to 10', must purchase for \$350 if over 10'.
- External air source required for the blow back option.

SPECIFICATIONS:

- Weight: 62 lbs. w/50' umbilical.
- Dimensions: 27" x 17" x 15", 38" x 18" x 6" & 5" x 5" x (sheath + 12").
- Power: 110V, 22w.
- Outputs: RS22 cable.
- Response Time: 1-7 sec. at <70 fpm.
- Max Pressure: 20 psi.
- Differential Pressure: 0.001 to 60" in wc.
- Number of Boxes: 1 box, 1 pelican case and 1 tube.
- Probe Tip Type: DAT Probe United Sensors, 5 holes and thermocouple.
- Probe Material: Stainless Steel.
- Probe temperature Limit: < 900°F.
- Console Operating: 40°F - 140°F.